

# PT255-S

## PAN-AND-TILT UNIT FOR THE CCTV129 AND CCTV114 CAMERAS



The PT255-S is a pan-and-tilt unit for the CCTV129 and CCTV114 cameras. It seamlessly regulates its movements and can be equipped with a potentiometer for pan-and-tilt registration.

### APPLICATIONS

- Pan-and-tilt unit for use with the CCTV129 and CCTV114 cameras

### BENEFITS


- High radiation tolerance
- Robust design
- Seismically certified
- Can be equipped with potentiometers for pan&tilt registration

### SPECIFICATIONS

Width	325 mm (12.8")
Length	198 mm (7.8")
Height	498 mm (19.6")
Housing material	Stainless steel
Weight	24 kg, (53 lbs)
Temperature range	5-70°C (41-158°F)
IP classification	IP65
Pan angle	324° (adjustable 84° to 360°)
Tilt angle	180° (90-0-90°)
Radiation tolerance (total dose)	1 000 000 Gy (100 000 000 rad)

*We reserve the right to alter specifications without prior notice*

## PT255-S IMAGES

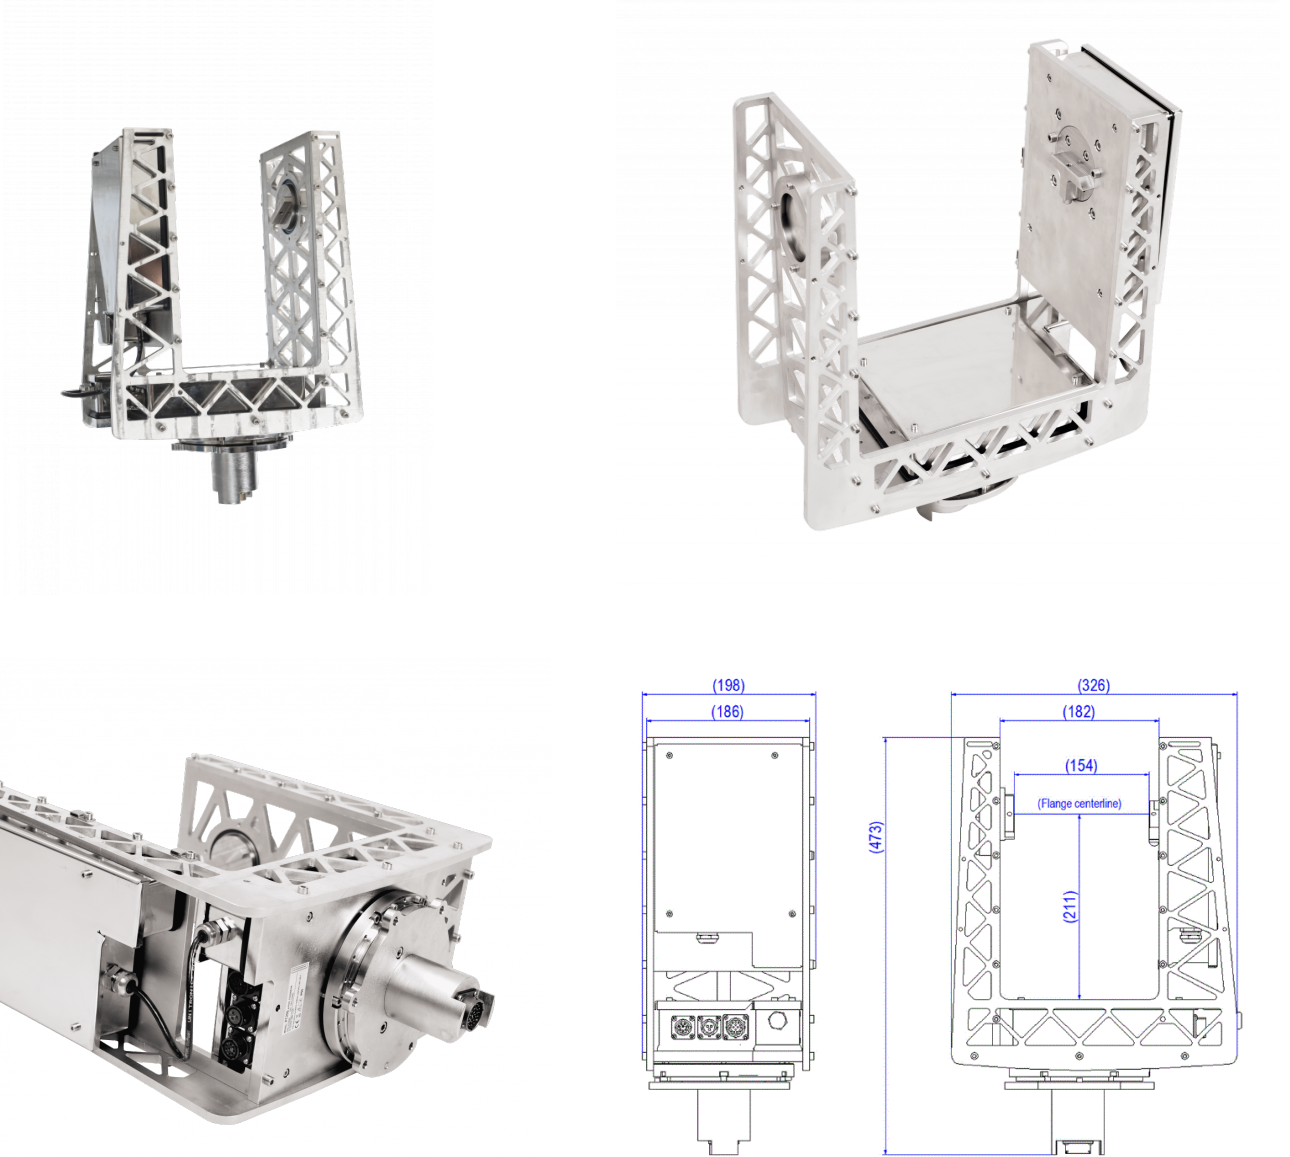

*We reserve the right to alter specifications without prior notice*