

PT255-S

PAN-AND-TILT UNIT FOR THE CCTV129 AND CCTV114 CAMERAS



The PT255-S is a pan-and-tilt unit for the CCTV129 and CCTV114 cameras. It seamlessly regulates its movements and can be equipped with a potentiometer for pan-and-tilt registration.

APPLICATIONS

- Pan-and-tilt unit for use with the CCTV129 and CCTV114 cameras

BENEFITS


- High radiation tolerance
- Robust design
- Seismically certified
- Can be equipped with potentiometers for pan&tilt registration

SPECIFICATIONS

| | |
|----------------------------------|--------------------------------|
| Width | 325 mm (12.8") |
| Length | 198 mm (7.8") |
| Height | 498 mm (19.6") |
| Housing material | Stainless steel |
| Weight | 24 kg, (53 lbs) |
| Temperature range | 5-70°C (41-158°F) |
| IP classification | IP65 |
| Pan angle | 324° (adjustable 84° to 360°) |
| Tilt angle | 180° (90-0-90°) |
| Radiation tolerance (total dose) | 1 000 000 Gy (100 000 000 rad) |

We reserve the right to alter specifications without prior notice

PT255-S IMAGES

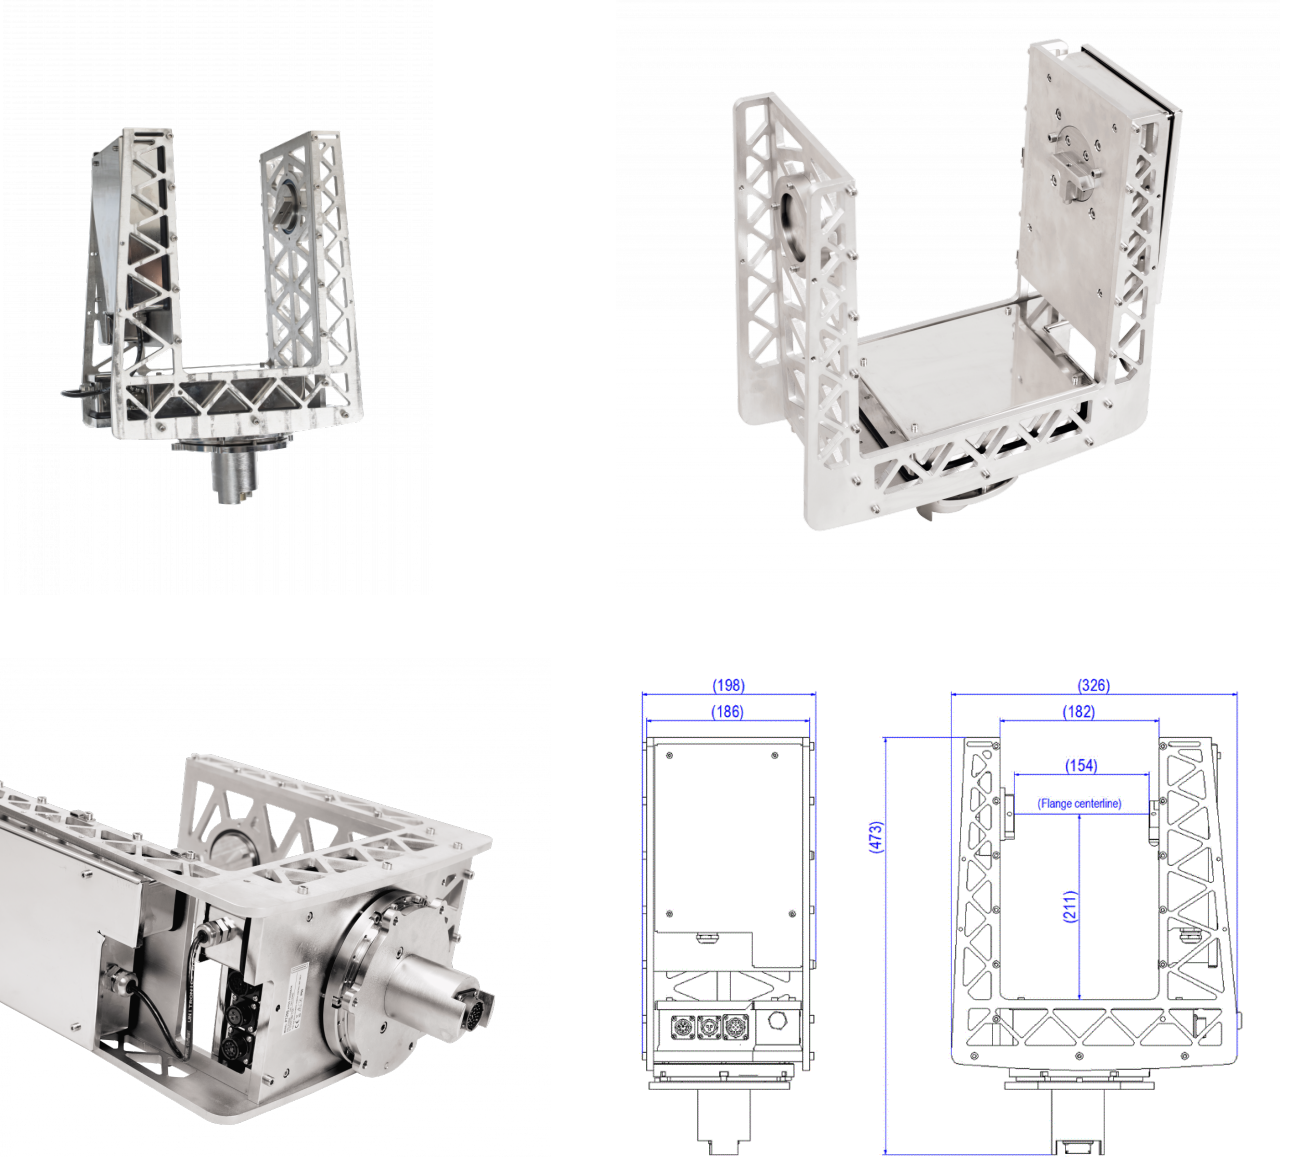

We reserve the right to alter specifications without prior notice